
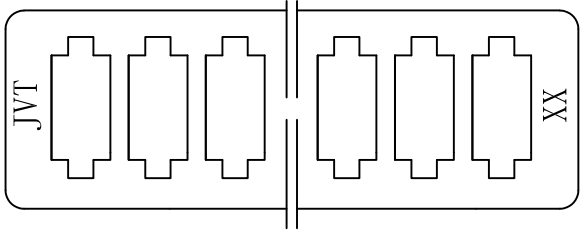
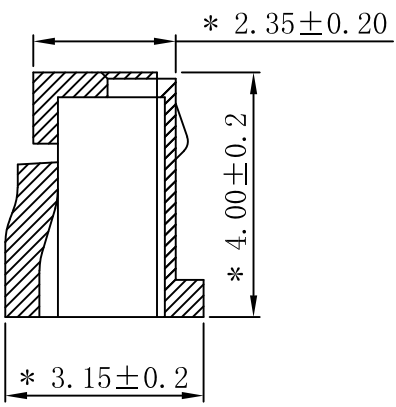
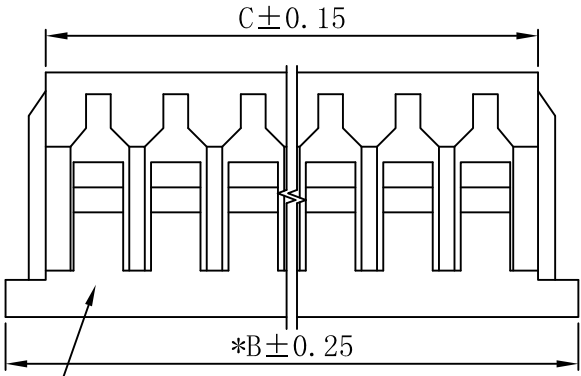


RoHS

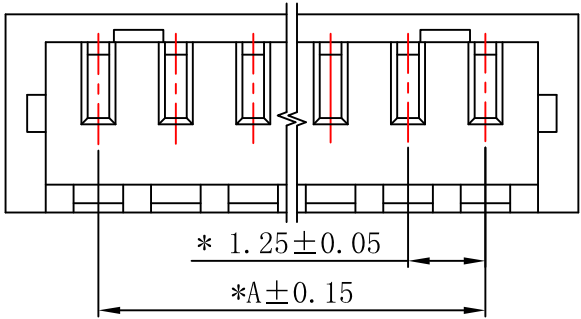

- SPECIFICATIONS :**
- Voltage Rating: 125V AC / DC
 - Current Rating: 1A AC / DC
 - Withstanding Voltage: 250V AC/minute
 - Temperature Range: -25℃~+85℃
 - Insulation Resistance: 100MΩ Min.
 - Contact Resistance: 40mΩ Max.
 - *Suitable JVT1146T series Terminal
JVT1147W series Wafer

***Material:**
Material: PA66/PBT UL 94V-0
Color:natural color

Packing specifications:
2~10P 2,000 pcs/bag
11~16P 1,000 pcs/bag
*is the key control size

JVT1146HN0-XX
Logo Pin NO.
Series NO. HN0-PA66 UL94V-0
Housing PT-PBT UL94V-0

Poles	Dimensions (mm)		
	A	B	C
02	1.25	4.20	2.95
03	2.50	5.50	4.20
04	3.75	6.70	5.45
05	5.00	8.00	6.70
06	6.25	9.20	7.95
07	7.50	10.50	9.20
08	8.75	11.70	10.45
09	10.00	13.00	11.70
10	11.25	14.20	12.95
11	12.50	15.50	14.20
12	13.75	16.70	15.45
13	15.00	18.00	16.70
14	16.25	19.20	17.95
15	17.50	20.50	19.20
16	18.75	21.70	20.45

Version		Content of change		Date	Signature	GENERAL TOLERANCE		Unit				mm		Scale		1:1		Date	20120805	Approved by		Check	Design	Standard	1.25mm Male HSG without nicks			
						0 ±0.35														LI		CLYDE	LU	P/N	JVT1146HN0-XX			
						.0 ±0.30																		Map title	031	Version	A0	
						.00 ±0.20																						
						.000 ±0.10																						

