
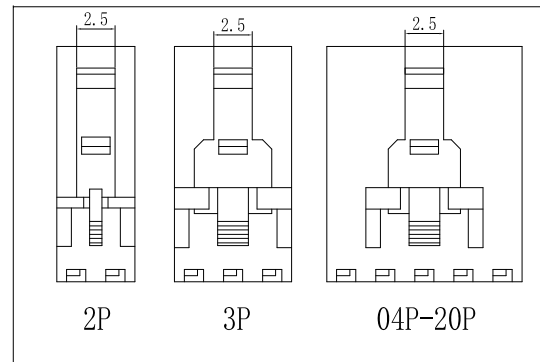
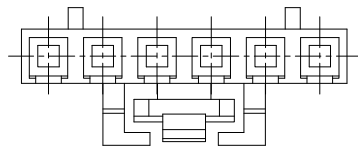
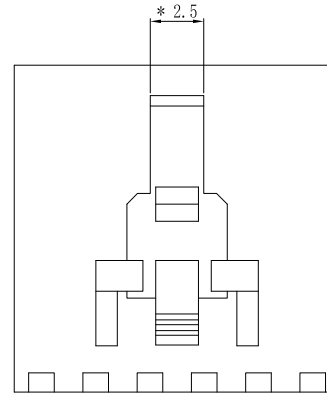
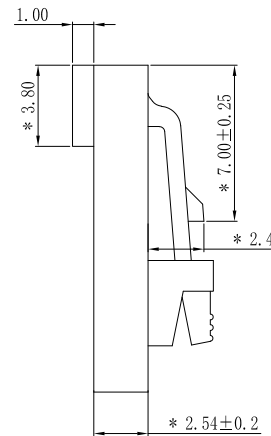
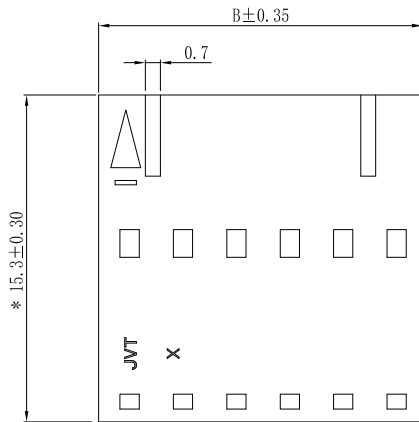



RoHS

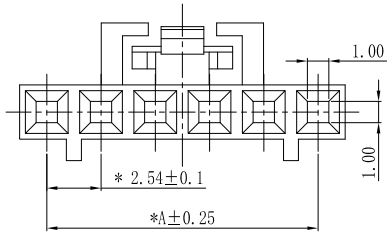

SPECIFICATIONS :

- Voltage Rating: 250V AC / DC
- Current Rating: 3.0A AC / DC
- Withstanding Voltage: 1000V AC/minute
- Temperature Range: -40℃~+105℃
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30mΩ Max.
- Suitable JVT1142T series Terminal
- JVT1143W series Wafer

Material:

Material: PA66 UL 94V-0

Color:natural color

Packing specifications:

02p-2K/bag

03~08p-1K/bag

*is the key control size

JVT1142HN0-XXXXL
Logo Series NO. Housing NO-PA66 UL94V-0
Lock BK-Black WH-White Pin NO.



PART No	Dimension		PART No.	Dimension	
	A	B		A	B
02	2.54	5.08	11	25.40	27.94
03	5.08	7.62	12	27.94	30.48
04	7.62	10.16	13	30.48	33.02
05	10.16	12.70	14	33.02	35.56
06	12.70	15.24	15	35.56	38.1
07	15.24	17.78	16	38.1	40.64
08	17.78	20.32	17	40.64	43.1
09	20.32	22.86	18	43.1	45.64
10	22.86	25.40	20	48.18	50.72

				GENERAL TOLERANCE		JVT JOYET CONNECTORS JOYET CONNECTORS					Approved by	Check	Design	Standard	2.54mm lock HSG				
				0	±0.35						LI	CLYDE	LU	P/N	JVT1142HNO-XXXXL				
				.0	±0.30														
				.00	±0.20														
				.000	±0.10														
Version	Content of change			Date	Signature		Unit	mm	Scale	1:1	Date	20190510				Map title	031	Version	A0