

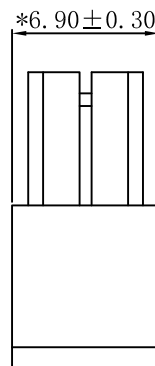
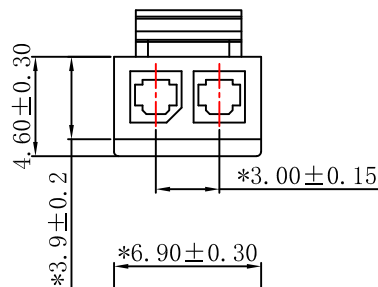

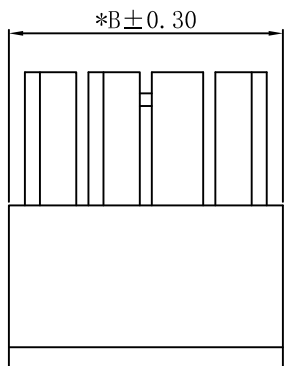


RoHS

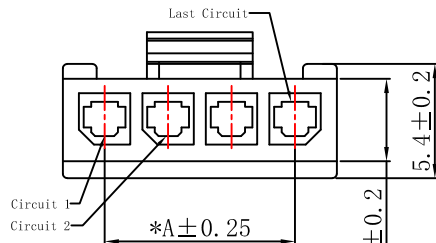

■ SPECIFICATIONS :

- Voltage Rating: 250V AC / DC
- Current Rating: 5A AC / DC
- Withstanding Voltage: 1500V AC/minute
- Temperature Range: -25℃~+105℃
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- *Suitable JVT3025T series Terminal JVT3026W series Wafer

■ *Material:

Material: PA66 UL 94V-0
Color:natural color/Black





■ Packing specifications:

02~05P 2,000 pcs/bag

06P以上 1,000 pcs/bag

*is the key control size

JVT3025HN0-XXXX
Logo Series NO. Housing NO-PA66 UL94V-0
No-Natural color BK-Black Pin NO.

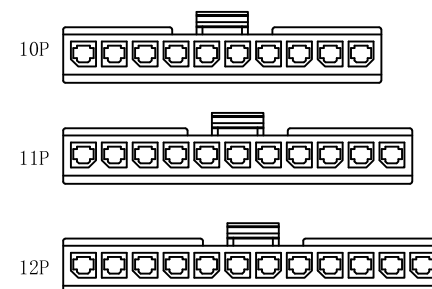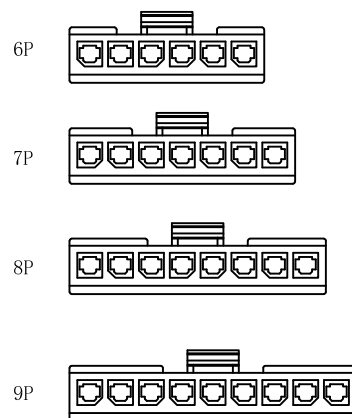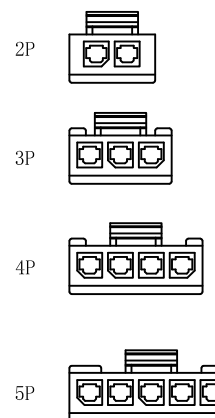

POLES	A	B
2	3.00	6.90
3	6.00	9.90
4	9.00	12.90
5	12.00	15.90
6	15.00	18.90
7	18.00	21.90
8	21.00	24.90
9	24.00	27.90
10	27.00	30.90
11	30.00	33.90
12	33.00	36.90



					GENERAL TOLERANCE				JVT 乔业连接器 JVT CONNECTORS				Approved by	Check	Design	Standard	3.0mm HSG								
					0	±0.35							LI	CLYDE	LU	P/N	JVT3025HN0-XXXX								
					.0	±0.30										Map title	031	Version	A0						
					.00	±0.20																			
Version	Content of change			Date	Signature		0.00		±0.10																
						Unit	mm	Scale	1:1	Date	20130604														
A					B			C			D			E			F			G			H		