
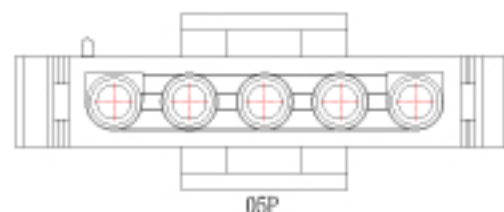
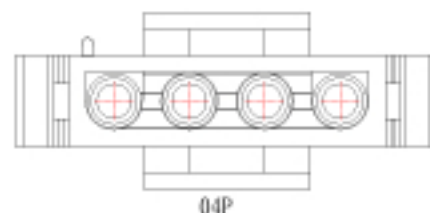
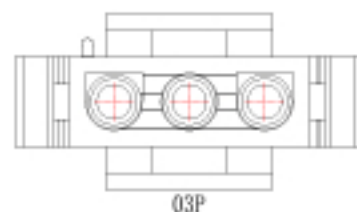
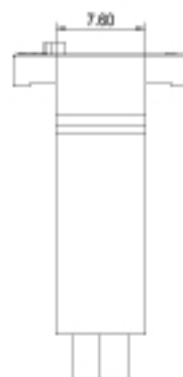


RoHS

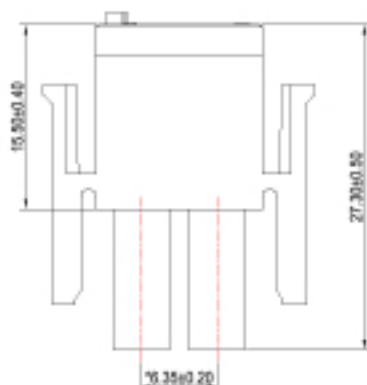

SPECIFICATION

- Voltage rating: 300V AC, DC
- Current Rating: 10A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: $20m\Omega_{max}$
- Insulation resistance: $1000M\Omega_{min}$
- Temperature range: $-25^{\circ}C \sim +85^{\circ}C$

HOUSING

- Material: Nylon66 UL94V-2

JVT6350HN2-XX
 Logo
 Series NO.
 Housing
 X2-PA66 UL94V-2
 Pin NO.

Poles	Dimensions (mm)	
	A	B
02	6.35	14.00
03	12.70	20.35
04	19.05	26.70
05	25.40	33.05

Version	Content of change	Date	Signature	General Tolerance 0 ±0.25 .0 ±0.25 .1 ±0.25 .15 ±0.25 .2 ±0.25	Unit	mm	Scale	1:1	Date	20220115	Approved by	Li	Check	CLYDE	Design	LIU	Standard	PIN	6.35mm 1/16" HSG	JVT6350HN2-XX	Map file	031	Version	A0

Meli 米莱