

13790510059


5

4



3

2


1

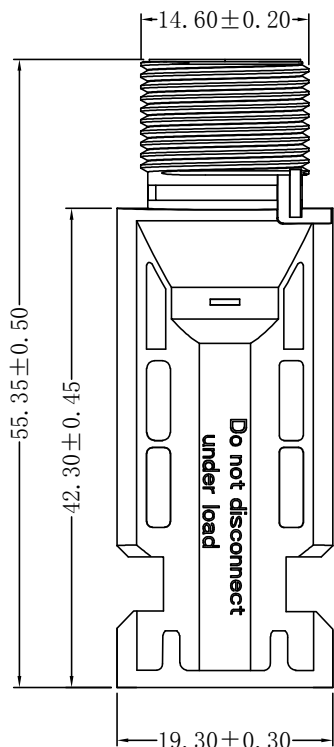


①

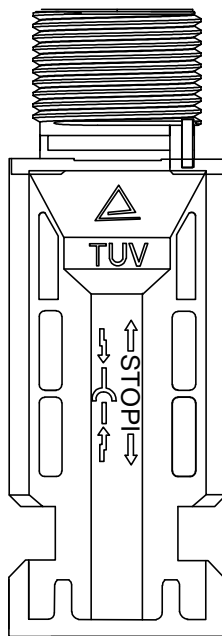



③

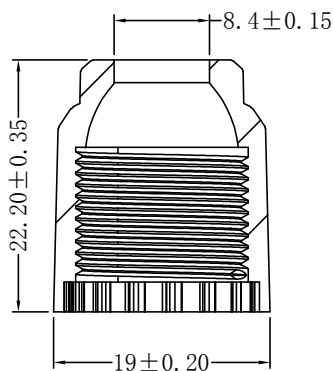

④

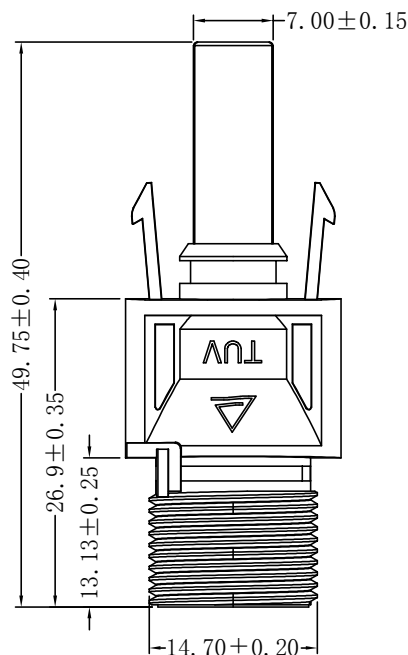


⑤

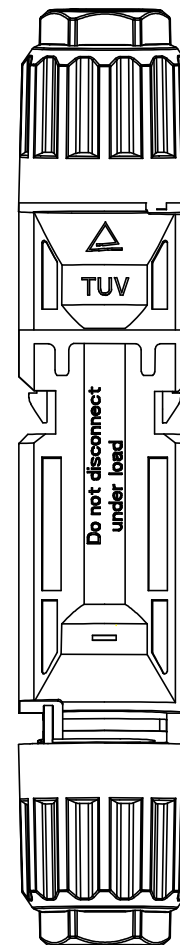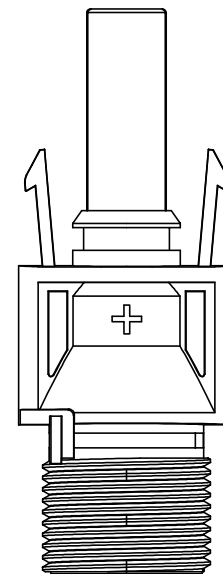


组合件

Supporting information


型号	配线规格	A	B	配端子	工作电流
b	光伏线6MM ²	10.9	8.9	⑥ ⑦	40A Max
a	光伏线4MM ²	10.9	8.8	⑥ ⑦	30A Max
c	光伏2.5MM ²	11.1	8.1	⑧ ⑨	40A Max
d	光伏线6MM ²	/	/	⑧ ⑨	40A Max




②




⑥

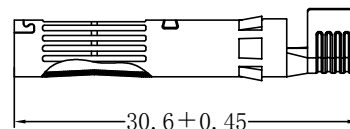


⑦



⑧



⑧

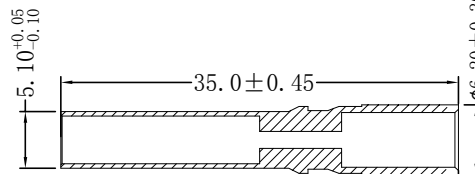

⑨

SPECITION:

- 1、材质:端子 : 合金铜
- 2、测试电压: DC 1500V;
- 3、工作电流: 30A/40A Max;
- 4、防水等级: IP67;
- 5、接线规格: 光伏线2.5mm²/4mm²/6mm²;
- 7、工作温度: -40℃~+85℃;
- 8、防火等级: UL94-V0

EST MC4-004-a

羿通代码+型号 编号 型号

版次	日期	变更内容	核 准
REVISION	DATE	DESCRIPTION	APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: ESTMC4-004

品名 TITLE: MC4线端连接器

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024. 10. 26

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



6

5

4

3

2

1

EST